

Additel 762

Automated Hydraulic Pressure Calibrator



- Automated pressure generation and control to 10,000 psi (700 Bar)
- Accuracy to 0.01%FS
- Dual-range manual or auto select
- Control stability $\leq 0.005\%FS$
- Portable - designed for use in the field and in the lab
- Control by optional external pressure modules
- Supports two external pressure modules
- Wi-Fi, LAN, Bluetooth, USB and Ethernet communication
- Full HART field communicator
- HART and PROFIBUS communication
- Data logging and task management
- Patented electric pump technology

OVERVIEW

The Additel 762 Automated Pressure Calibrator is unlike any other pressure calibrator on the market. This revolutionary product is a complete turnkey solution for automation of pressure calibration work up to 10,000 PSI.

Designed for use in both the field and the laboratory, the portability and accuracy of this state-of-the-art product will quickly become the favorite go-to calibrator for lab personnel and field technicians alike.


With fully automated support for calibration of pressure transmitters, switches, dial and digital gauges and sensors, including HART/PROFIBUS devices in conjunction with a fully integrated task feature, data collection and Wi-Fi connectivity, we had our customer's needs in mind when designing our most capable pressure calibrator to date.



Metrology Made Simple

Dual-Range Accuracy to 0.01% FS

The ADT762 includes the unique ability to automatically switch between different internal calibrations depending on the current control pressure of the ADT762. Additel provides calibrations unique to each ADT762 for ranges of 0-3,000 PSI (200 Bar) and 0-10,000 PSI (700 Bar). As the calibrator is pressurized, it will automatically select the control and measurement specification based on the specific pressure range. Pressure calibration range selection can be set to “auto” mode so the calibration range is automatically selected by the ADT762 based on the set point pressure, or the calibration range can be manually selected.

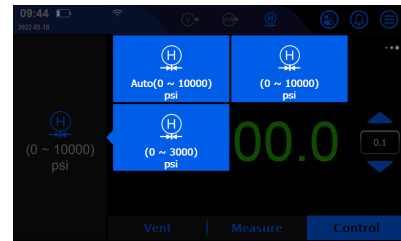


Built-in Auto-Purge Application

Purging hydraulic calibration systems can be challenging and time consuming. The ADT762 has been designed with an integrated auto-purge system that saves time, money and frustration by completely automating the removal of air from the system. With the push of a button, the ADT762 quickly manages the system purging. This helps to free up time for technicians to attend to other needs.





Documented Task Feature

The powerful documented calibration task application allows users to quickly create and execute tasks without the need for a PC or tablet. The ADT762 automatically analyzes errors, generates test reports, while storing results locally. The Additel 762 can support up to 1000 documented tasks which can be stored and recalled at any time to help save time and money.

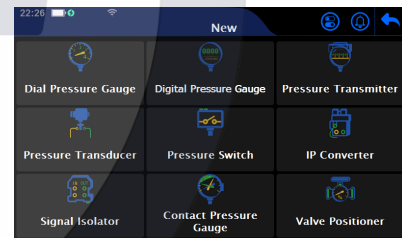

Dual-Mode Hart Communication

HART pressure transmitters can be directly maintained and calibrated without any other equipment or tools. The ADT762 provides an automatic HART calibration mode as well as a manual mode. This dual-mode HART communication function not only provides an efficient and convenient interoperability mode for DUT, but also supports access to a fully HART capable calibrator.

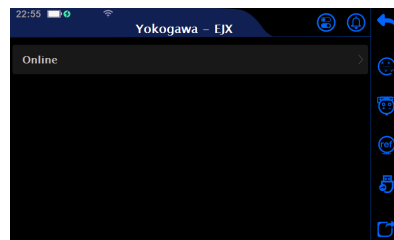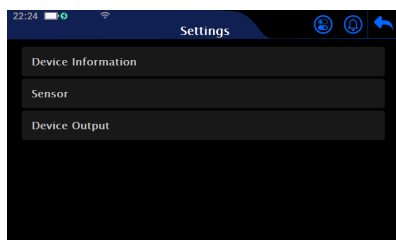



Metrology Made Simple

Pressure Specifications

Model	ADT762 Automated Hydraulic Pressure Calibrator	
Specification		
Pressure Range	0~10,000 psi (0-700 Bar)	
Range Selection	Manual 3K psi, Manual 10K psi or Auto-range	
Accuracy	0~10,000 psi, 0.01%FS	0~10,000 psi, 0.02%FS
	0~3,000 psi, 0.01%FS	0~3,000 psi, 0.02%FS
Maximum External Load Capacity	Max: 80 ml@700 Bar, 50 ml recommend	
Reservoir	Max: 350 ml, push-on reservoir cap, built-in filter	
Control Stability ^[1]	≤ 0.005%FS	
Stability Duration	> 5 min	
Pressure Module	Built-in one module with dual range	
External Control Pressure Module	See the following "External Control Pressure Module Specification and Compatibility" table	
External Measurement Pressure Module	All ADT161 pressure modules	

[1] Control Stability is based on the range selection or external module

Electrical Specifications

Model	Range	Resolution	Accuracy	Note	
Current Measure	Auto-ranging ±25 or ±50 mA	0.1 μA	0.008 %RD + 1.0 μA	Impedance < 10 Ω	
			0.008 %RD + 2.0 μA		
Voltage Measure	Auto-ranging ±5, ±12 or ±30 V	1 μV	0.008 %RD + 6 μV	Impedance > 1 GΩ	
			±5 V: 20 μV		0.008 %RD + 100 μV
			±12 V: 0.1 mV		0.008 %RD + 240 μV
			±30 V: 0.1 mV		0.008 %RD + 600 μV
Loop Power Source	24 V	N/A	±1 V	50 mA (Max Loading)	
mA Source	0 to 2.5 mA or 2.5 to 25 mA	0-2.5 mA: 0.05 μA 0-25 mA: 0.5 μA	0-2.5 mA: 0.008 %RD + 0.1 μA 0-25 mA: 0.008 %RD + 1.0 μA	20 mA @ 1 kΩ	
Power Source	16 to 30 V	1 V	±1 V	70 mA (Max Loading)	
V Source	0 to 16 V	0.25 mV	0.008 %RD + 0.002 %FS		
Pressure Switch	Mechanical Switch, Live Mechanical Switch, NPN Switch, PNP Switch	N/A	N/A	Response time < 10 ms if the switch is powered. Voltage range: (3-30) V	
Temperature Compensation	18 °C to 28°C				
Temperature Coefficient	Outside of 18 °C to 28 °C: <± 0.0005%RD + 0.00005%FS/°C				
Misuse Protection	Up to 30 V on any two sockets				
Pressure Switch Test	●				
HART / PROFIBUS PA	●				

● Supported





Metrology Made Simple

External Control Pressure Module Specification and Compatibility

Model	Specification	Pressure Range		Accuracy (%FS)	Pressure Type	Media
		(psi)	(bar)			
ADT161-01-GPXXM for 0.01%FS		1,000	70	0.01	Gauge	G,L
		1,500	100	0.01	Gauge	G,L
		2,000	140	0.01	Gauge	G,L
		3,000	200	0.01	Gauge	G,L
		5,000	350	0.01	Gauge	G,L
		10,000	700	0.01	Gauge	G,L
ADT161-02-GPXX for 0.02%FS		1,000	70	0.02	Gauge	G,L
		1,500	100	0.02	Gauge	G,L
		2,000	140	0.02	Gauge	G,L
		3,000	200	0.02	Gauge	G,L
		5,000	350	0.02	Gauge	G,L
		10,000	700	0.02	Gauge	G,L



General Specifications

Specification	Description
User Interface	Color touch screen and keypad operation
Display	7" TFT touch screen 800 x 480 color
Enclosure IP Rating	IP31
Power	Dedicated lithium battery or power adapter
Battery	Rechargeable Li-Ion battery, typically 12 hours of operation, less than 5 hours recharge.
Weight	28 lbs (12.8 kg) without media
Size	11.81 x 8.66 x 7.56 in (300 x 220 x 192 mm)
Communications	USB, LAN, Bluetooth, Wi-Fi
HART Communication	Read, configure and calibrate HART devices - DD files updated periodically
Data Storage	> 8 GB
Data Logging	Up to 1,000,000 readings (data and time stamped)
Task Documentation	Up to 1,000 tasks can be stored with data
Automation Functions	Switch test, auto step, leak test
User Interface Localization	English, German, French, Italian, Spanish, Portuguese, Chinese, Japanese, and Russian
Pump Life	> 1,000,000 cycles
Environmental Specifications	Operating temperature: 32 °F to 122 °F (0 °C to 50 °C)
	Storage temperature: -20 °C to 60 °C (-4 °F to 120 °F)
	Humidity: <90%, non-condensing
Certification	ISO 17025 accredited certificate of calibration with NIST-traceable data
Compliance	CE
Software Compatibility	ACal, Additel Land and Additel Link for access via mobile application
Warranty	1 year

ORDERING INFORMATION

Model Number

ADT762

01

GP10K

N

Accuracy:

01 = 0.01% of full span

02 = 0.02% of full span

Pressure port type:

N - 1/4 NPT female















N2 - 1/2 NPT female



B - 1/4 BSP female

B2 - 1/2 BSP female

M - M20X1.5 female



Accessories (included)		
Model number	Quantity	Picture
9022 Test Leads	2 sets (4 pcs)	
USB Cable	1 pc	
9725 Rechargeable Li-ion battery	1 pc	
9818 110V/220V external Power adapter	1 pc	
Funnel	1 pc	
ADT100-762Hose High pressure hose	1 pc	
Small accessory case (For cables and adaptors)	1 pc	
Transportation cap	1 pc	
9907-762 Carrying case	1 pc	
9203 Sebecate oil (500ml)	1 bottle	
O rings for liquid storage tank 3.5*1.2-NBR70	5 pcs	
O rings for right angle connector 5*1.5-NBR70	5 pcs	
9060 Pressure module connection cable	1 pc	
ADT100-762-X	1 pc	
ISO17025 accredited calibration certificate	1 pc	

Optional Accessories		
Model number	Description	Picture
ADT107-X-KIT	Includes dual ports manifold, pressure hose and zero return communication cable	
ADT161	Pressure modules see pg. 4	
ADT100-762-X	ADT762 right angle connector	